
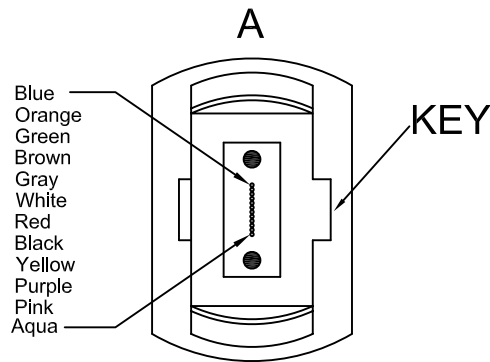


MPO/PC-MPO/PC Type-B OM3 12fiber Jumper

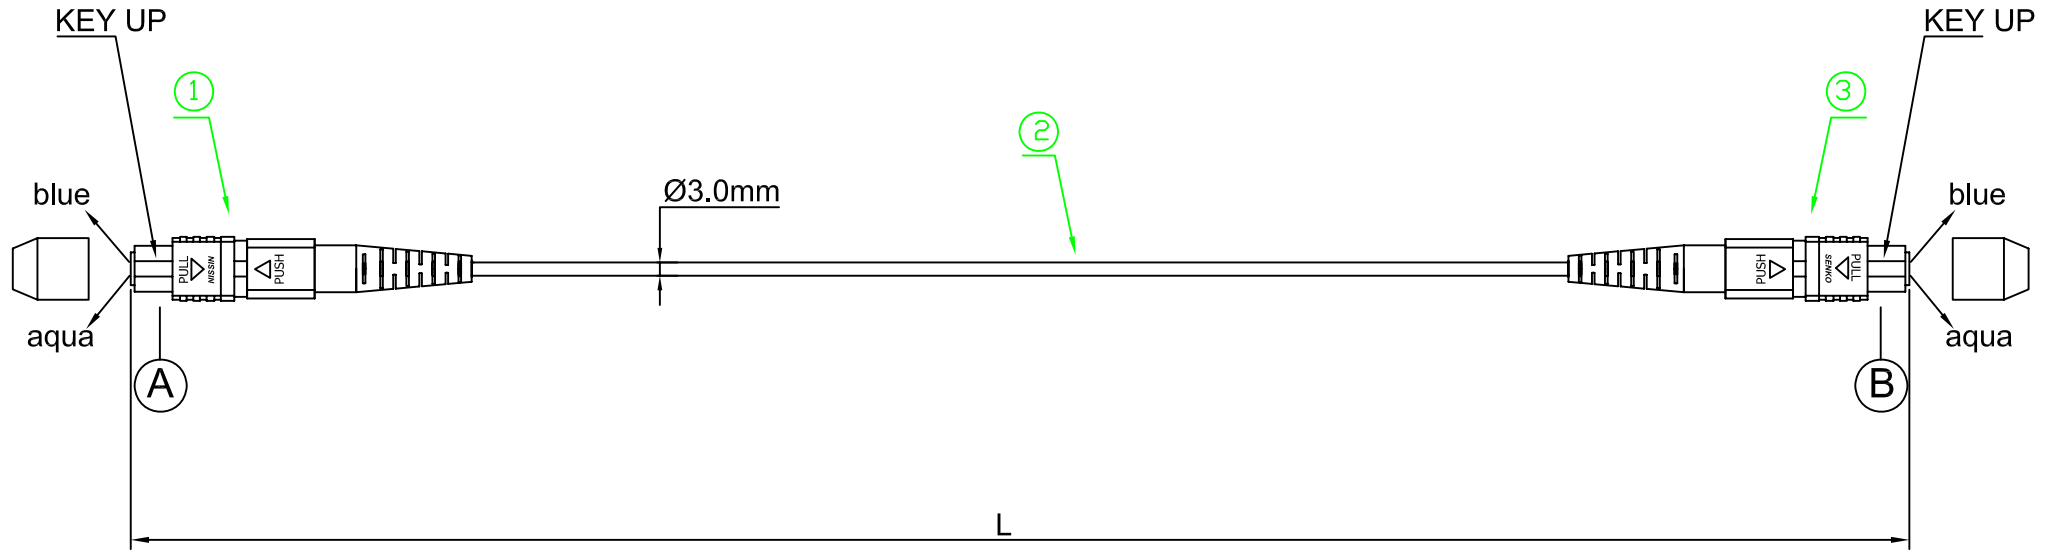


SPECIFICATIONS

Polishing Type	MPO/PC
Tested Wavelength	850nm & 1300nm
Insertion Loss	MPO≤0.70dB
Repeatability	≤0.1dB
Durability	MPO:≤0.2dB typical change 500matings
Interchangeability	≤0.2dB
Operating Temperature	-40°C~+85°C

LENGTH TOLERANCE

Length (L)	Tolerance
L < 1M	+150mm/-0
1M ≤ L < 10M	+150mm/-50mm
10M ≤ L < 30M	+200mm/-50mm
30M ≤ L	+1%/-0

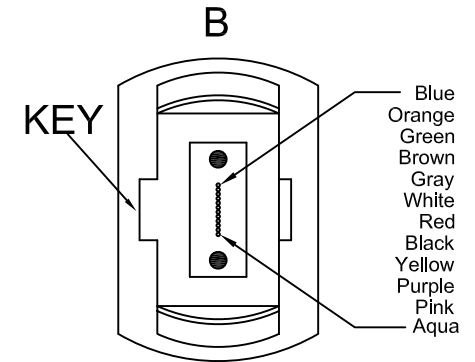

TITLE MPO-MPO 12fiber Jumper

NO.	PART NAME	DESCRIPTION	Q'TY	REMARK	REV	A0	PRODUCT NO	APPD	/
③	MPO connector	12core MPO Female connector , Aqua housing,black boot	1						
②	Cable	50/125um,OM3 12fibers, OD.=Ø3.0mm,LSZH, Aqua jacket	/						
①	MPO connector	12core MPO Female connector , Aqua housing,black boot	1						

SHEET	1/1	DWG NO.	P170408	DRAWN	Oven17.4.1
UNIT	mm	CHECKED	/	APPD	/