

VC-QSFPDD-200G-ER4

200Gb/s QSFP-DD ER4 40km Optical Transceiver

Features

- ✓ Supports 200GBASE-ER4; Lane bit rate 50 Gb/s with PAM4
- ✓ Up to 40km transmission on SMF;
- ✓ LAN WDM EML laser and APD receiver;
- ✓ 200GAUI-8 Electrical interface with 8 Lanes 26.5625Gb/s NRZ high-speed signal;
- ✓ I2C interface with integrated Digital Diagnostic monitoring;
- ✓ QSFP-DD MSA package with duplex LC connector;
- ✓ Compliant with IEEE 802.3cn -2019 200GBASE-ER4
- ✓ Single +3.3V power supply;
- ✓ Maximum power consumption 12W;
- ✓ Operating case temperature: 0 to +70 °C;
- ✓ Complies with EU Directive 2015/863/EU;



Application

- ✓ 200GBASE-ER4 Ethernet (PAM4)
- ✓ 5G Back-haul
- ✓ Data center
- ✓ Cloud application.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Storage Temperature	TS	-40	-	85	°C
Supply Voltage	VCC	-0.5	-	3.6	V
Operating Relative Humidity	RH	0	-	85	%

Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Operating Case Temperature	TC	0		70	°C	

Power Supply Voltage	VCC	3.13	3.3	3.47	V	
Power Dissipation	P	-	-	12	W	
Pre-FEC Bit Error Ratio	Pre-FEC BER	-	-	2.4×10^{-4}		1
Post-FEC Bit Error Ratio	Post-FEC BER	-	-	1×10^{-12}		1
Transmission Distance	TD	-	-	40	km	2

Optical Characteristics

Transmitter						
Parameter	Symbol	Min	Typical	Max	Unit	Notes
Signaling rate, each lane	BR	26.5625 ± 100 ppm			GBd	
Modulation format		PAM4				
Lane wavelengths	L0	1294.53	1295.56	1296.59	nm	
	L1	1299.02	1300.05	1301.09	nm	
	L2	1303.54	1304.58	1305.63	nm	
	L3	1308.09	1309.14	1310.19	nm	
Side-mode suppression ratio	SMSR	30	-	-	dB	
Total average launch power	PMAX	-	-	12.63	dBm	SMF
Average launch power, each lane	POUT	0.4	-	6.63	dBm	SMF
Outer OMA, each lane	OMA _{outer}	3.4	-	7.4	dBm	SMF
Difference in launch power between lanes		-	-	4	dB	OMA
Launch power in OMA _{outer} minus TDECQ	OMA _{outer} - TDECQ	-	1.8	-	dBm	ER ≥ 4.5dB
Transmitter and dispersion eye closure for PAM4	TDECQ	-	-	3.2	dB	
Average POUT (Laser Turn off)	POFF	-	-	-30	dBm	
Extinction ratio, each lane	ER	6	-	-	dB	

Receiver					
Signaling rate, each lane	BR	26.5625 ± 100 ppm			GBd
Modulation format		PAM4			
Lane wavelengths	L0	1294.53	1295.56	1296.59	nm
	L1	1299.02	1300.05	1301.09	nm
	L2	1303.54	1304.58	1305.63	nm
	L3	1308.09	1309.14	1310.19	nm
Damage threshold, each lane	PDAMAGE	-2.37	-	-	dBm
Average receive power, each lane	PRX_LANE	-17.6	-	-3.37	dBm
Receive power (OMA _{outer}), each lane	RXOM_A	-	-	-2.6	dBm
Receiver sensitivity (OMA _{outer}), each lane	SENOM_A	-15.1	-	-	dBm

Note: all test condition compliance with IEEE P802.3cn™/D0. 1


Electrical Characteristics

Digital Diagnostics

Transmitter (Module Input)					
Parameter		Symbol	Min.	Typical	Max. Unit
Differential Data Input Amplitude		VIN,P-P	70	-	900 mVpp
Differential Termination Mismatch			-	-	10 %
Tx_Disable	Normal Operation	VIL	-0.3	-	0.8 V
	Laser Disable	VIH	2.0	-	VCC+0.3 V
Receiver (Module Output)					
Parameter		Symbol	Min.	Typical	Max. Unit
Differential Data Output Amplitude		VOUT,P-P	200	-	900 mVpp
Differential Termination Mismatch (1MHZ)			-	-	10 %
Rx_LOS	Normal Operation	VOL	-	-	0.4 V
	Lose Signal	VOH	VCC-0.5	-	VCC+0.3 V

Parameter	Range	Accuracy	Unit	Calibration
Temperature	0 to 70	±3	°C	Internal
Voltage	0 to VCC	0.1	V	Internal
Tx Bias Current Per Lane	0 to 100	10 %	mA	Internal
Tx Output Power Per Lane	0.4 to 6.63	±3	dBm	Internal
Rx Power (Each Lane)	-17.6 to -2.37	±3	dBm	Internal

Pin Definitions

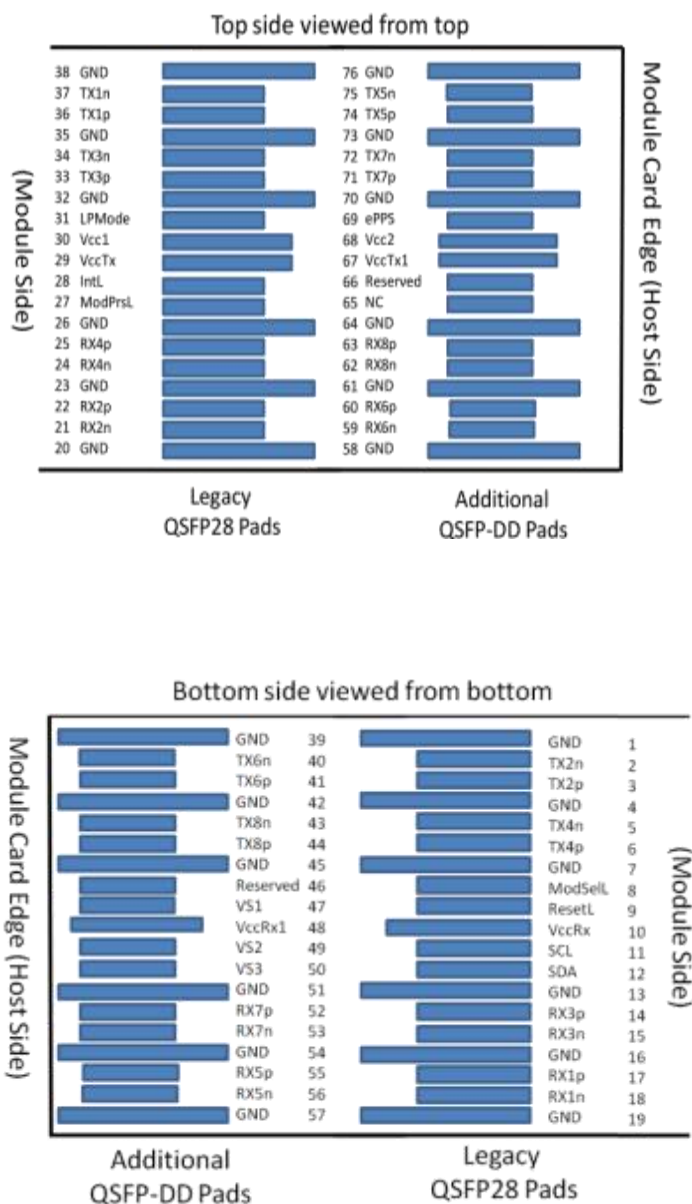

PIN	Logic	Symbol	Description	Plug Seq.	Notes
1		GND	Ground	1B	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3B	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	3B	
4		GND	Ground	1B	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	3B	
6	CML-I	Tx4p	Transmitter Non-Inverted Data output	3B	
7		GND	Ground	1B	1
8	LVTLL-I	ModSel L	Module Select	3B	
9	LVTLL-I	ResetL	Module Reset	3B	
10		VccRx	+3.3V Power Supply Receiver	2B	2
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock	3B	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data	3B	
13		GND	Ground	1B	
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	3B	
15	CML-O	Rx3n	Receiver Inverted Data Output	3B	
16		GND	Ground	1B	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	3B	
18	CML-O	Rx1n	Receiver Inverted Data Output	3B	
19		GND	Ground	1B	1
20		GND	Ground	1B	1
21	ML-O	Rx2n	Receiver Inverted Data Output	3B	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	3B	
23		GND	Ground	1B	1
24	CML-O	Rx4n	Receiver Inverted Data Output	3B	
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	3B	
26		GND	Ground	1B	1
27	LVTTL-O	ModPrs L	Module Present	3B	
28	LVTTL-O	IntL/RX_L OS	Interrupt/Rx LOS	3B	
29		VccTx	+3.3 V Power Supply transmitter	2B	2

30		Vcc1	+3.3 V Power Supply	2B	2
31	LVTTTL-I	LPMode/Tx S	Low Power mode/Tx Disable	3B	
32		GND	Ground	1B	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	3B	
34	CML-I	Tx3n	Transmitter Inverted Data Input	3B	
35		GND	Ground	1B	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	3B	
37	CML-I	Tx1n	Transmitter Inverted Data Input	3B	
38		GND	Ground	1B	1
39		GND	Ground	1A	
40	CML-I	Tx6n	Transmitter Inverted Data Input	3A	
41	CML-I	Tx6p	Transmitter Non-Inverted Data Input	3A	
42		GND	Ground	1A	1
43	CML-I	Tx8n	Transmitter Inverted Data Input	3A	
44	CML-I	Tx8p	Transmitter Non-Inverted Data Input	3A	
45		GND	Ground	1A	1
46		Reserve d	For future use	3A	3
47		VS1	Module Vendor Specific 1	3A	3
48		VccRx 1	3.3V Power Supply	2A	2
49		VS2	Module Vendor Specific 2	3A	3
50		VS3	Module Vendor Specific 3	3A	3
51		GND	Ground	1A	1
52	CML-O	Rx7p	Receiver Non-Inverted Data Output	3A	
53	CML-O	Rx7n	Receiver Inverted Data Output	3A	
54		GND	Ground	1A	1
55	CML-O	Rx5p	Receiver Non-Inverted Data Output	3A	
56	CML-O	Rx5n	Receiver Inverted Data Output	3A	
57		GND	Ground	1A	1
58		GND	Ground	1A	1
59	CML-O	Rx6n	Receiver Inverted Data Output	3A	
60	CML-O	Rx6p	Receiver Non-Inverted Data Output	3A	
61		GND	Ground	1A	1

62	CML-O	Rx8n	Receiver Inverted Data Output	3A	
63	CML-O	Rx8p	Receiver Non-Inverted Data Output	3A	
64		GND	Ground	1A	1
65		NC	No Connect	3A	3
66		Reserved	For future use	3A	3
67		VccTx1	3.3V Power Supply	2A	2
68		Vcc2	3.3V Power Supply	2A	2
69		Reserved	For future use	3A	3
70		GND	Ground	1A	1
71	CML-I	Tx7p	Transmitter Non-Inverted Data Input	3A	
72	CML-I	Tx7n	Transmitter Inverted Data Input	3A	
73		GND	Ground	1A	1
74	CML-I	Tx5p	Transmitter Non-Inverted Data Input	3A	
75	CML-I	Tx5n	Transmitter Inverted Data Input	3A	
76		GND	Ground	1A	1


Note :

1. QSFP-DD uses common ground (GND) for all signals and supply (power). All are common within the QSFP-DD module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane

2: VccRx, VccRx1, Vcc1, Vcc2, VccTx and VccTx1 shall be applied concurrently.

Requirements defined for the host side of the Host Card Edge Connector are listed in Table 6. VccRx, VccRx1, Vcc1, Vcc2, VccTx and VccTx1 may

Mechanical Dimension

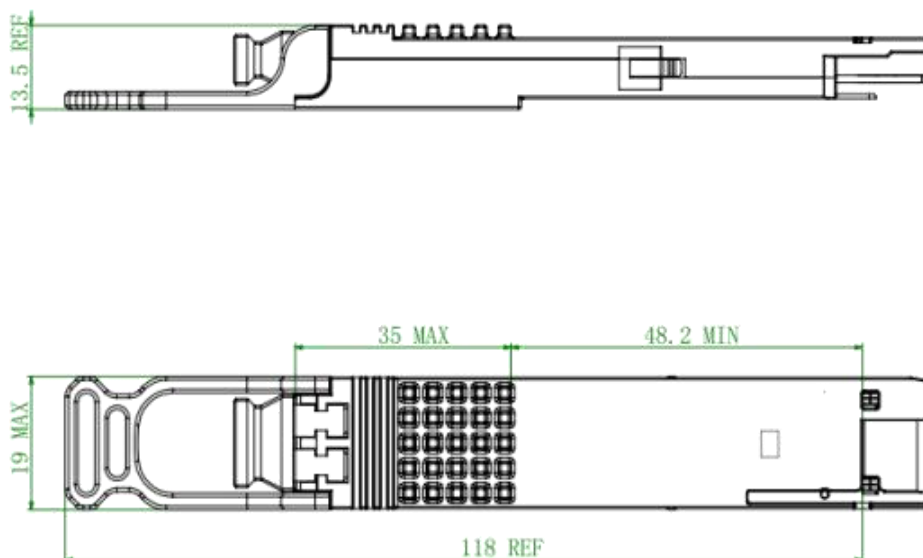

Ordering information

Part Number	Product Description
VC-QSFPDD-200G-ER4	212.5Gb/s,LWDM EML,SMF,40km,LC,0~70C,Y